


Duduk Bench Cut list/supplies

2 x 8 x 8' Lumber (Qty 1.5)

2 1/2" deck screws (Qty 6)

2 x 12 x 8' lumber (Qty 1)

4" deck screws (qty 10)

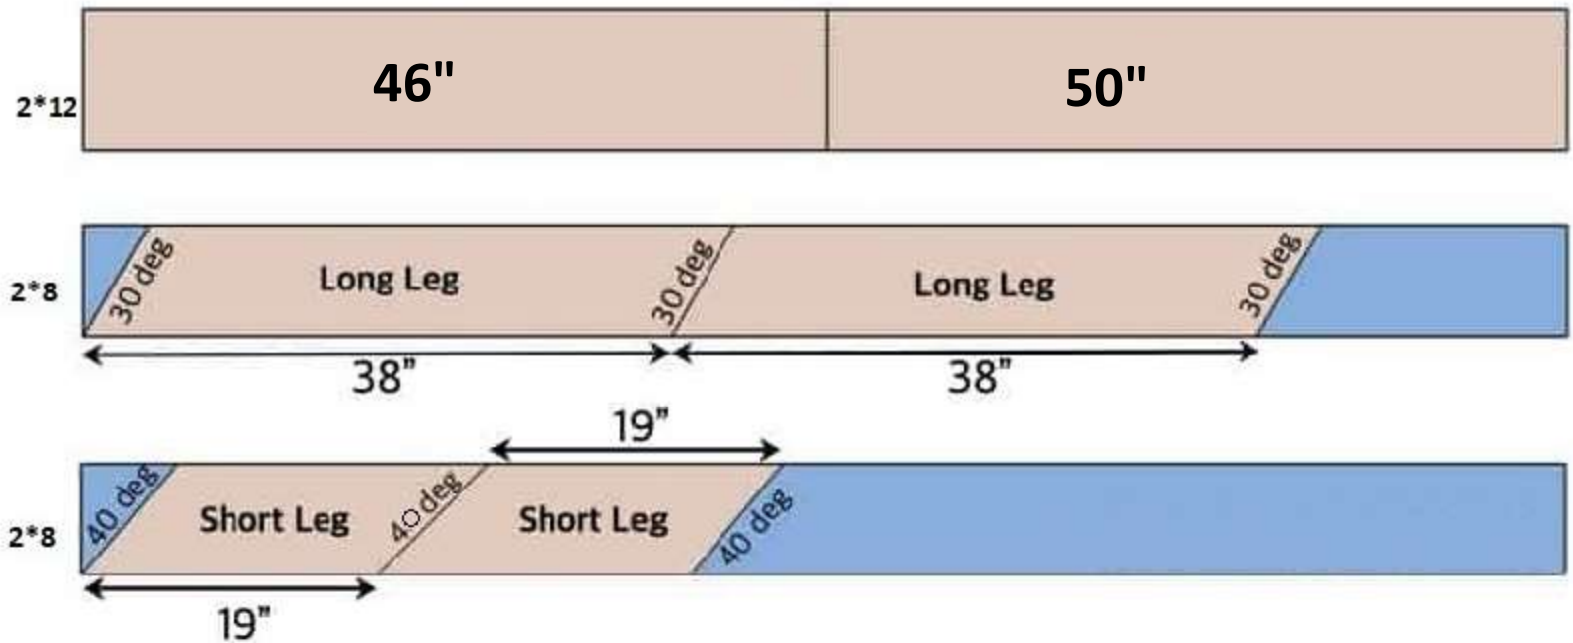



Construction instructions

1. Build both legs separately (3 screws each)
2. Transport bench to build site (Optional)
3. Attach seat with no overhang at front (6 screws total)
4. Flip bench forward and attach backrest (4 screws total)



Duduk Bench Build sheet

Locate legs as shown and
secure with **2-1/2" deck
screws.**

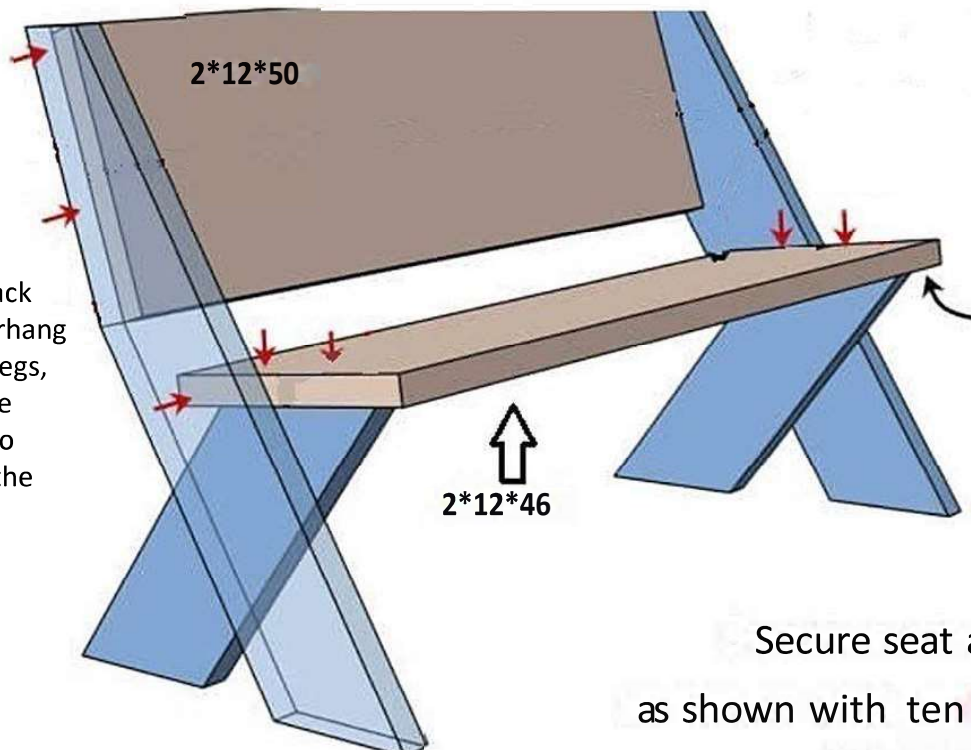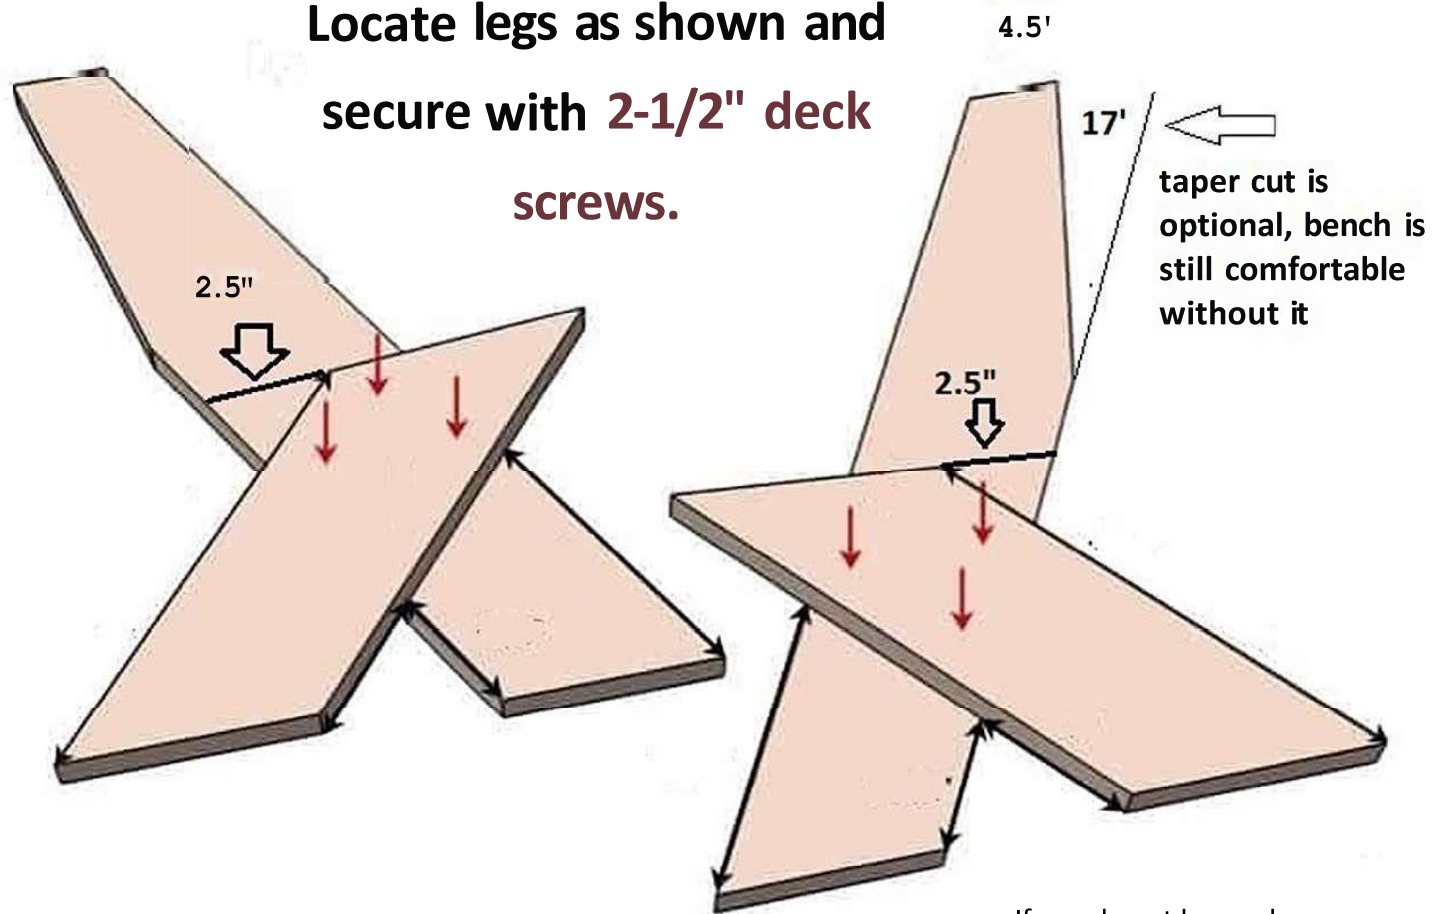

The seat-back
should overhang
the bench legs,
allowing the
screws to go
straight in the
back.

If you do not have a large
vehicle **DO NOT** attach seat and
back to bench.
Instead transport bench in 4
pieces to installation site and
finish assembly there!
With this method almost any
vehicle can carry multiple
benches

No overhang with seat

Secure seat and back
as shown with ten **4" deck screws.**

(Not all shown)